


F Series

Flexible Pad

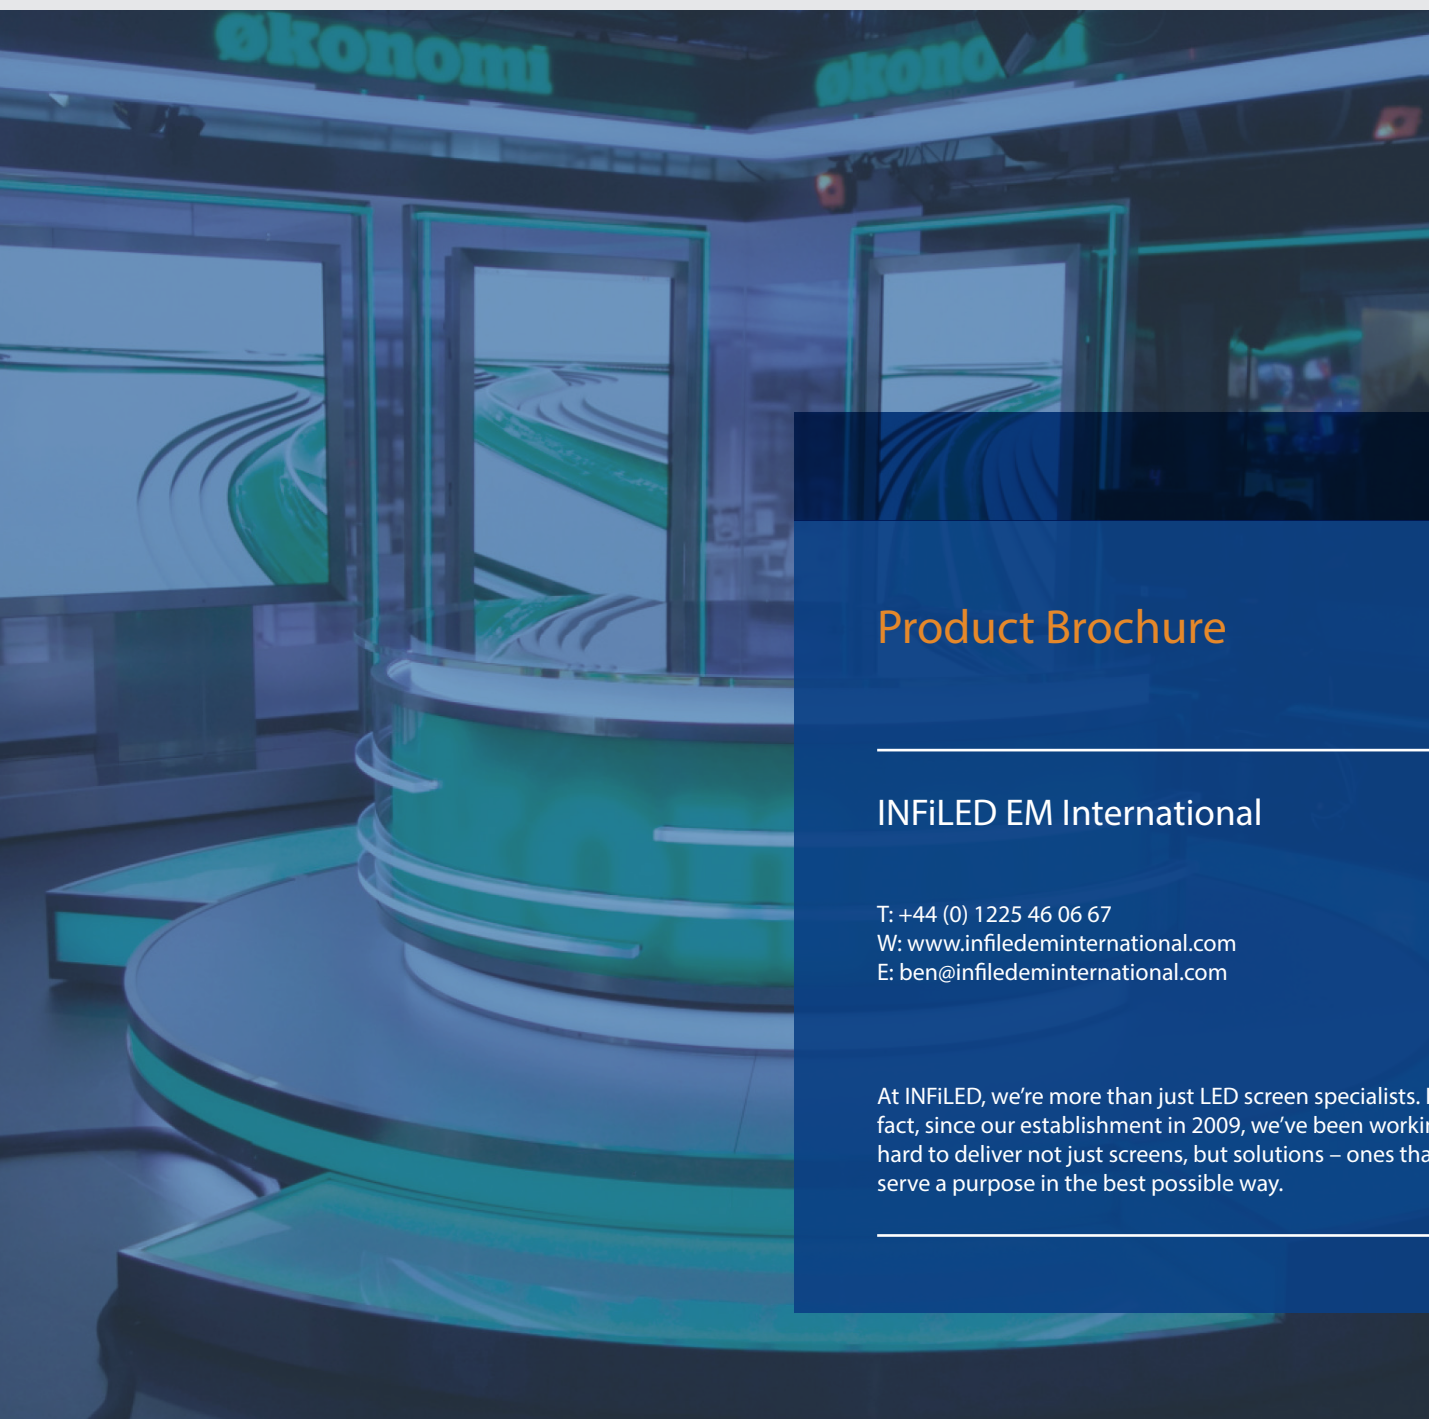

Product Brochure

INFILED EM International



T: +44 (0) 1225 46 06 67

W: www.infiledeminternational.com

E: ben@infiledeminternational.com

At INFILED, we're more than just LED screen specialists. In fact, since our establishment in 2009, we've been working hard to deliver not just screens, but solutions – ones that serve a purpose in the best possible way.

F Series Flexible Pad

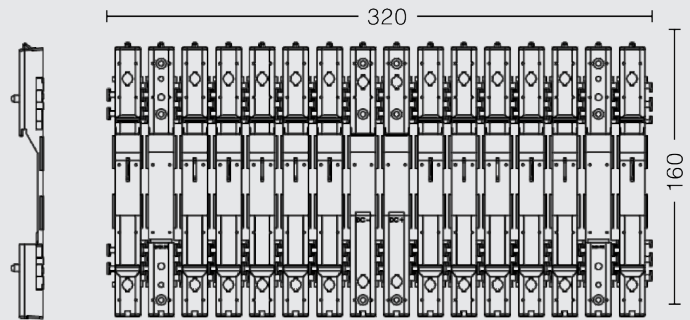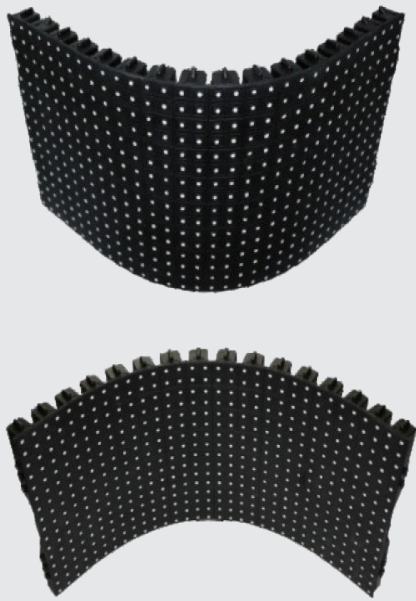

Features include:


- Flexible display with convex and concave options
- High refresh rate
- Easy assembly and installation via magnetic cylinder
- Front maintenance
- Options for both fixed and hanging installations

INFiLED's F series displays are designed with user convenience in mind, being incredibly easy to assemble and front serviceable.


Being specifically designed for more creative applications, its soft PCB design allows users to create a large concave or convex curve, with can also be adapted into various flexible shapes for a variety of creative purposes.

Specification

Part Number	IL-FISS-IRSF2.5	IL-FISS-IRSF4	IL-FISS-IRSF6	IL-FISS-IRSF10
Pixel Pitch	2.5mm	4mm	6.67mm	10mm
Physical Density	160,000pixels	62,500pixels	22,500pixels	10,000pixels
LED Arrangement	3IN1SMD	3IN1SMD	3IN1SMD	3IN1SMD
Module Resolution	128x64pixels	64x48pixels	48x24pixels	32x16pixels
Module Dimension	320x160mm (12.60x6.30in)	256x192mm (10.08x7.56in)	320x160mm (12.60x6.30in)	320x160mm (12.60x6.30in)
Cabinet Weight	500g(1.10lb)	540g(1.19lb)	500g(1.10lb)	500g(1.10lb)
Brightness Level	1000nits	1000nits	1200nits	1200nits
Max Power Consumption	390w/m ²	390w/m ²	390w/m ²	390w/m ²
Avg Power Consumption	130w/m ²	130w/m ²	130w/m ²	130w/m ²
Viewing Angle	120°/120°	110°/110°	110°/110°	110°/110°
Operating Power Source	AC90-260V 50-60Hz	AC90-260V 50-60Hz	AC90-260V 50-60Hz	AC90-260V 50-60Hz
Refresh Rate	1,000~3,840Hz (Configurable)	1,000~3,840Hz (Configurable)	1,000~3,840Hz (Configurable)	1,000~3,840Hz (Configurable)
Protection Rate	IP30	IP30	IP30	IP30
Verification	Composite, S-Video, Component, VGA, DVI, HDMI, HD_SDI	Composite, S-Video, Component, VGA, DVI, HDMI, HD_SDI	Composite, S-Video, Component, VGA, DVI, HDMI, HD_SDI	Composite, S-Video, Component, VGA, DVI, HDMI, HD_SDI

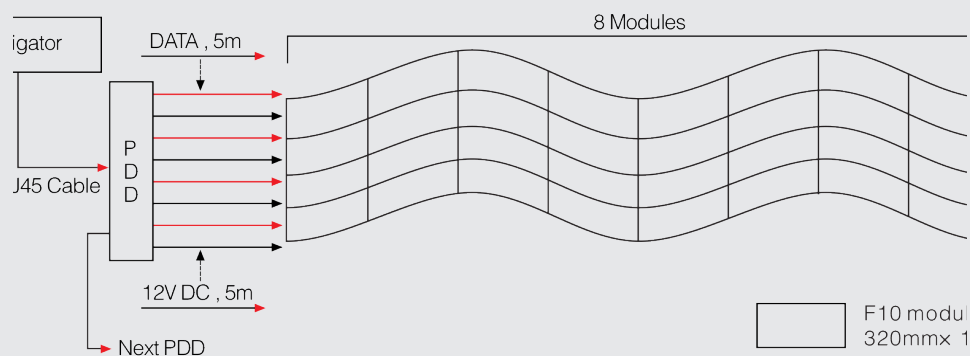

PDD

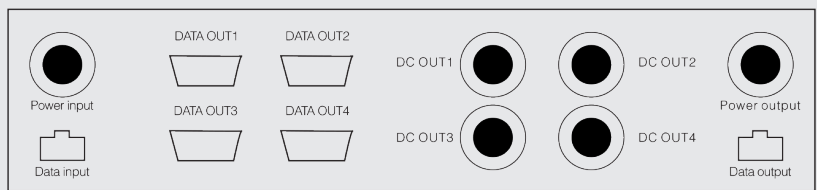

Each PDD can support 8x 4 = 32 modules max

Contact Us

INFiLED EM International

T: +44 (0) 1225 46 06 67

W: www.infiledeminternational.com

E: ben@infiledeminternational.com

